





## Features and Benefits

- Rapid deployment without aid of ancillary equipment, set-up anywhere
- Lightweight frame, packaging allows shelter to be moved / stowed by two people
- Vertical 6 ft. sidewalls maximize usable square footage
- Sealable vinyl floor maintains environmentally secure shelter (SW-20, SG-20, SK-20)
- Can be configured with roof or walls only for maximum flexibility in deployment
- Interior frame allows access to horizontal support bars capable of holding up to 50 lbs
- Rigid double doors provide a large entryway
- Roof vent caps significantly reduces condensation
- Framework design allows individual replacement of parts
- Flame retardant vinyl is UV resistant for long life, resists mildew and abrasion

## Shelter Packages

SH-20	SW-20	SG-20	SK-20
1 Frame	1 Frame	1 Frame	1 Frame
1 Vent Cap	1 Vent Cap	1 Vent Cap	1 Vent Cap
1 Roof	1 Roof	1 Roof	1 Roof
1 Wall	1 Wall	1 Wall	1 Wall
1 Double Door	1 Double Door	1 Double Door	1 Double Door w/ Filler Panels
1 Stake Kit	2 Stake Kit	2 Stake Kit	2 Stake Kit
1 Vinyl Repair Kit	1 Vinyl Repair Kit	1 Vinyl Repair Kit	1 Vinyl Repair Kit
	1 Floor	1 Floor	1 Floor
	1 Threshold Ramp	1 Threshold Ramp	1 Threshold Ramp
		1 Insulation Roof	1 Insulation Roof
		1 Wiring Harness	1 Wiring Harness
		4 T36 Lights	5 T36 Lights
			1 Insulation Wall Set

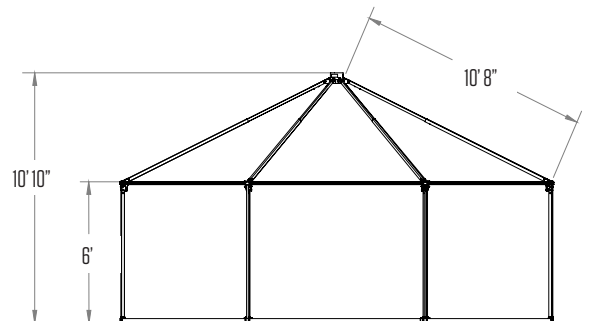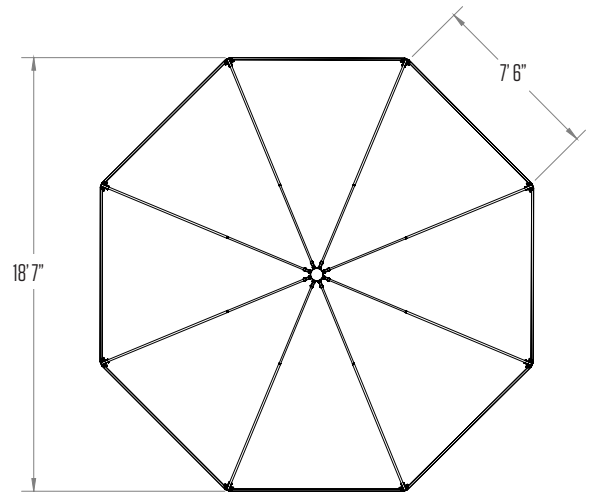

## 20 Specifications

Usable Area	18' 7" x 18' 7"	(5.7 x 5.7 m)
Total Weight	344 lbs	(156 kg)
Time Under Canopy	16 min / 4 personnel	
Total Set-Up Time	25 min / 4 personnel	
Square Footage	286 ft <sup>2</sup>	(26.6 m <sup>2</sup> )
Cube	2178 ft <sup>3</sup>	(663.9 m <sup>3</sup> )
Environment	-40°F - 120°F (-40°C to 48.9°C)	
Snow Load	10 lbs / ft <sup>2</sup> for 12 hrs	(50 kg / m <sup>2</sup> for 12 hrs)
Wind Load	55 mph w/gusts to 65 mph	(89 km/h w/gusts to 105 km /h)

### Dimensions

Footprint	18' 7" x 18' 7"	(5.7 x 5.7 m)
Sidewall	6'	(1.8 m)
Peak	10' 10"	(3.3 m)

### Packaged Dimensions

### Weights

Roof	24 x 20 x 10"	(60 x 51 x 25 cm)	40 lbs	(18.1 kg)
Door	26 x 3.5 x 72"	(66 x 9 x 183 cm)	45 lbs	(20.4 kg)
Wall	27 x 28 x 12"	(69 x 71 x 31 cm)	74 lbs	(33.6 kg)
Vinyl Floor	23 x 20 x 8"	(59 x 51 x 20 cm)	48 lbs	(21.8 kg)
Frame	91 x 14 x 16"	(231 x 36 x 41 cm)	134 lbs	(60.8 kg)

Berry Compliant Option



## Recommended Support Systems

### Shelter Connecting Systems

Increase the footprint of your shelter system with rigid frame connectors and entryways

### Electrical Distribution

Portable power and lighting to sustain your shelter complex

### Climate Control

Air heating, cooling, purifying and dehumidifying

### Water Distribution

Purification, storage, heating and distribution kits

### Hygiene Systems

Field showers and toilet stations

### Storage And Transport

Heavy-duty cases and customizable cargo trailers

### Digital ID

Your logo or name custom printed on roofs and doors for easy identification

### Anchoring Systems

Secure your shelter against high winds

### Shelter Accessories

Beds, work stations, tables, seating and food prep



20 system shelter featuring SDI equipment set up and ready for use.